


# Hybrid Inverter

SUN-12/14/16K-SG01LP1-EU



Colorful touch LCD, IP65 protection degree

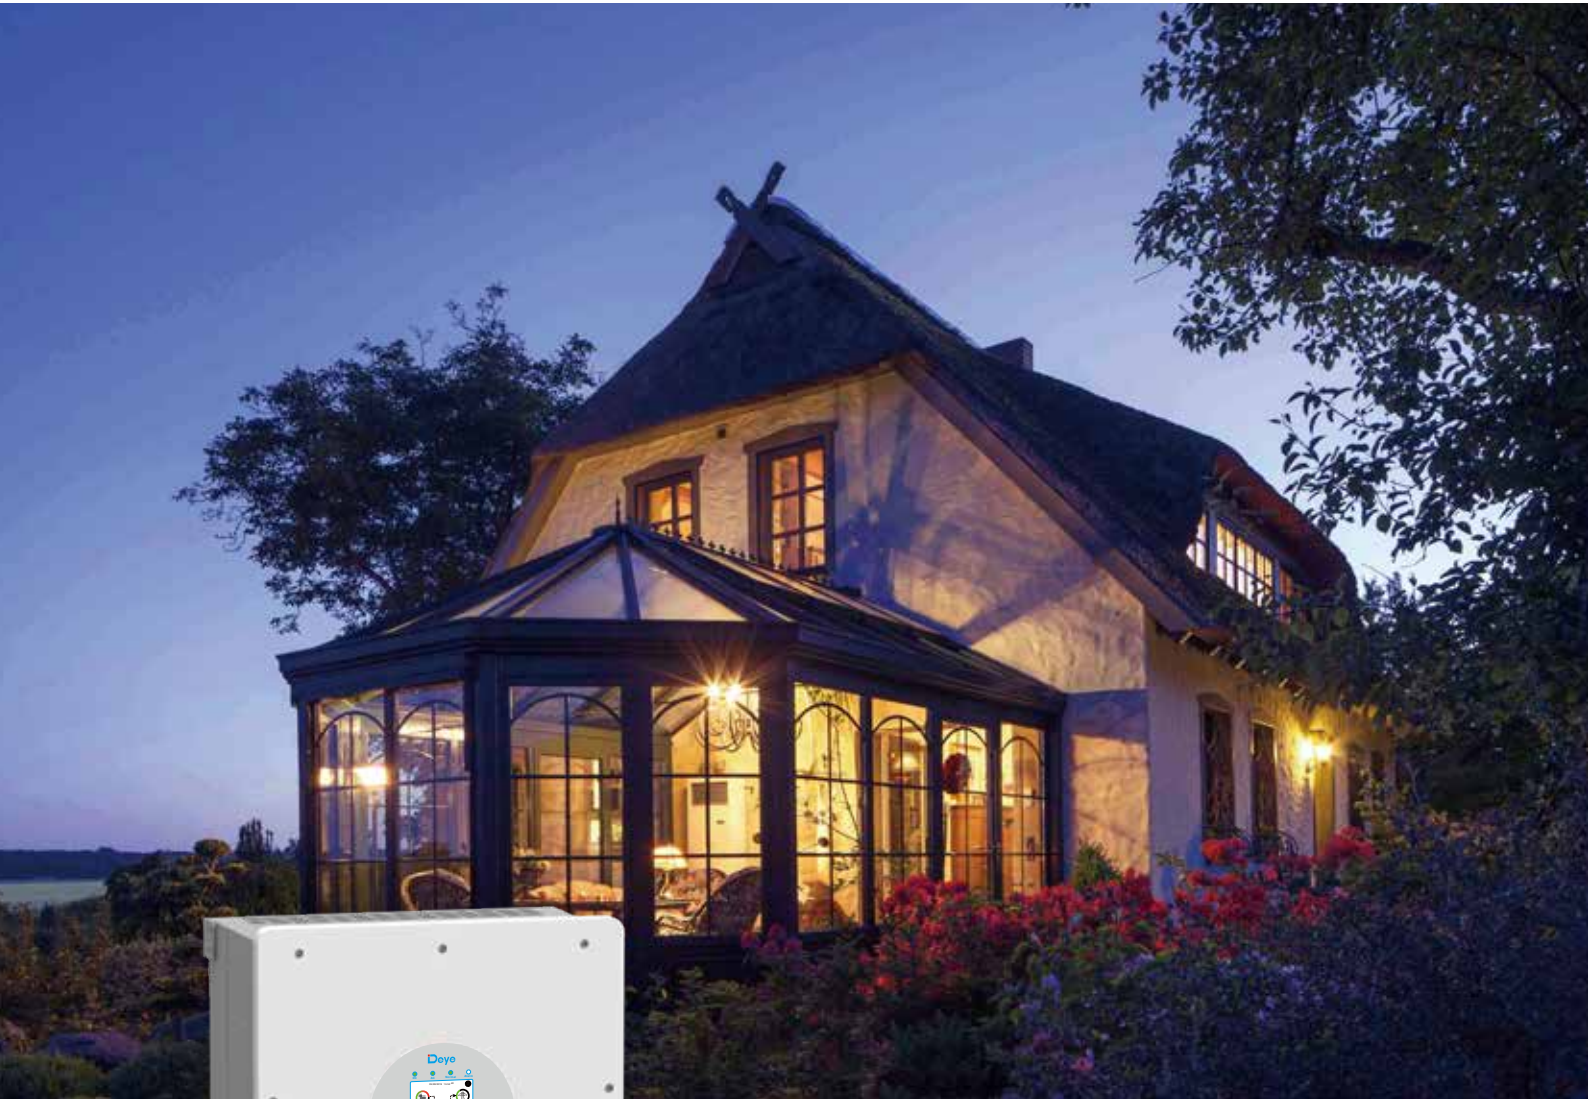

DC couple and AC couple to retrofit existing solar system

16

Max. 16pcs parallel for on-grid and off-grid operation; Support multiple batteries parallel

290

Max. charging/discharging current of 290A

6

6 time periods for battery charging/discharging



Support storing energy from diesel generator

**Deye**

Stock Code: 605117.SH

Model	SUN-12K-SG01LP1-EU	SUN-14K-SG01LP1-EU	SUN-16K-SG01LP1-EU
<b>Battery Data</b>			
Battery Type	Lead-acid or Lithium-ion		
Battery Voltage Range (V)	40~60		
Max. Charging Current (A)	220	250	290
Max. Discharging Current (A)	220	250	290
External Temperature Sensor	Yes		
Charging Curve	3 Stages / Equalization		
Charging Strategy for Li-Ion Battery	Self-adaption to BMS		
<b>PV String Input Data</b>			
Max. DC Input Power (W)	15600	18200	20800
Max. DC Input Voltage (V)	500		
Start-up Voltage (V)	125		
MPPT Range (V)	150-425		
Rated DC Input Voltage (V)	370		
PV Input Current (A)	26+26+26		
Max. PV I <sub>SC</sub> (A)	44+44+44		
No. of MPP Trackers	3		
No. of Strings per MPP Tracker	2		
<b>AC Output Data</b>			
Rated AC Output Active Power (W)	12000	14000	16000
Max AC Output Active Power (W)	13200	15400	17600
Rated AC Output Current (A)	54.5/52.2	63.6/60.9	72.7/69.6
Max AC Output Current (A)	60/57.4	70/67	80/76.5
Max. Continuous AC Passthrough (A)	100		
Peak Power (off grid)	2 time of rated power, 5 S		
Power Factor Adjustment Range	0.8 leading to 0.8 lagging		
Power Factor	1		
Output Frequency and Voltage	50/60Hz; L/N/PE 220/230Vac (single phase)		
Grid Type	Single Phase		
Total Harmonic Distortion (THD)	<3% (of nominal power)		
DC current injection	<0.5% I <sub>n</sub>		
<b>Backup Data</b>			
Backup Power (W)	10000	12000	14000
Backup Rated Current (A)	45.5/43.5	54.5/52.2	63.6/60.9
Backup UPS	4ms Automatic switchover time		
<b>Efficiency</b>			
Max. Efficiency	97.60%		
Euro Efficiency	96.50%		
MPPT Efficiency	99.90%		
Integrated	PV Input Lightning Protection, Anti-islanding Protection, PV String Input Reverse Polarity Protection, Insulation Resistor Detection, Residual Current Monitoring Unit, Output Over Current Protection, Output Shorted Protection, Surge protection		
Output Over Voltage Protection	DC Type II/AC Type III		
<b>Certifications and Standards</b>			
Grid Regulation	VDE4105, IEC61727/62116, VDE0126, AS4777.2, CEI 0 21, EN50549-1, G98, G99, C10-11, UNE217002, NBR16149/NBR16150		
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2		
<b>General Data</b>			
Operating Temperature Range ( )	-40~60°C, >45°C derating		
Cooling	Smart cooling		
Noise (dB)	≤30 dB		
Communication with BMS	RS485; CAN		
Weight (kg)	48.5		
Size (mm)	464W×798.4H×300D		
Protection Degree	IP65		
Installation Style	Wall-mounted		
Warranty	5 years		