

SOLAR MD STORAGE PRODUCTS



SOLAR MD SS7014 HIGH VOLTAGE ENERGY SOLUTION

The Solar MD SS7014 is a high voltage energy storage system with the Solar MD advanced BMU and BMS technology, integrated with major inverter brands as well as our data Logger: Logger V2.


The SS7014 is designed to be used in containerised solutions, as well as commercial and industrial locations.

LFP Prismatic Cells are incredibly durable, safe and powerful. Solar MD uses CATL cells and offers a performance guarantee of 12 years on the battery modules.

APPLICATIONS

- ✓ Off-grid electricity supplying your own mini grid
- ✓ Back-up power
- ✓ Peak shaving
- ✓ Increased self-consumption and PV usage
- ✓ Time of use (Via Logger V2 - limited PCS brands)
- ✓ Manual and AI based charging and discharging when you need it
- ✓ Power management via Logger V2 and advanced switching of consumers

Derating in kWh based on usage of 50 MWh / year

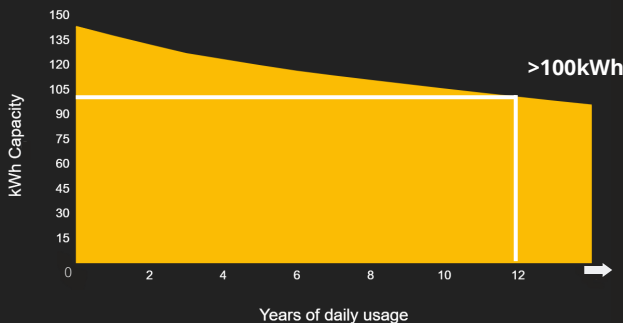

Guarantee on Product Material and Workmanship



Energy Output Warranty



E-Mail: info@solarmd.co.za

Phone: +27 (0)21 555 2181

Web: www.solarmd.com

Address: Unit 23, Alternator Park, 7 Alternator Avenue, Montague Gardens, 7441 Cape Town, South Africa

SOLAR MD STORAGE PRODUCTS



SS7014

SS7014 has been widely used in energy storage applications in the African market. The battery is produced with the world-leading CATL LiFePO4 technology.

BATTERY FEATURES

- ✓ Stable discharge platform
- ✓ Excellent safety
- ✓ Long life cycle
- ✓ High temperature performance
- ✓ High energy density
- ✓ High charge and discharge rate
- ✓ High efficiency
- ✓ No pollution

SS7014	
Cell chemistry	Lithium Iron Phosphate (LiFePO4)
Cell manufacturer	CATL
Rated capacity	143.0kWh
Nominal Power	100.0kW
Usable Battery Energy @0.3C	130.0kWh
Nominal Voltage	512V
Number of battery modules	10
Weight per module	115kg
Total weight	1220kg
Operational Voltage	448 - 556Vdc
Communication	CANBUS / RS485 / Ethernet
Dimensions W x D x H	848mm x 704mm x 1490mm
Cycle life @25°C	≥6000
Charging Efficiency	99%
Operational temperature	0°C to +50°C
Transport	UN3480 & UN38.3
Storage duration	6 months @25°C
Safety standard compliance	IEC 62619 / UN38.3 / UL1642
Cell certificate	TUV / CE / UL1642



✉ **E-Mail:** info@solarmd.co.za

☎ **Phone:** +27 (0)21 555 2181

🌐 **Web:** www.solarmd.com

📍 **Address:** Unit 23, Alternator Park, 7 Alternator Avenue, Montague Gardens, 7441 Cape Town, South Africa